
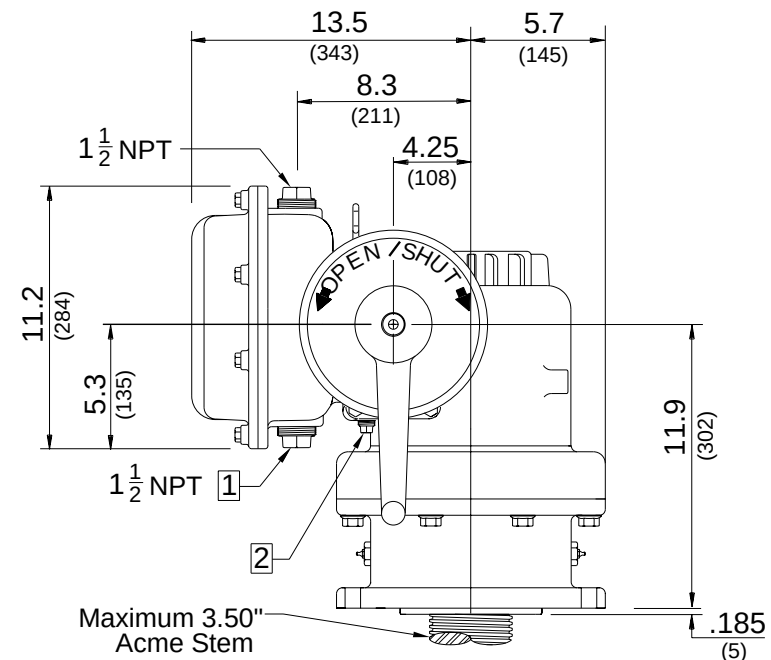
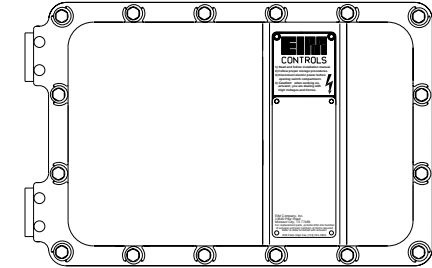


FOR REFERENCE ONLY - DRAWING NOT TO SCALE

Notes:

- ① 1½ NPT is preferred wire entry. **CAUTION** Conduit must enter actuator at lowest point. If hazardous location seal conduit with drain type fitting.
- ② Gear Box Lubrication ½ -14 NPT plugs.
- ③ Thrust base grease fittings

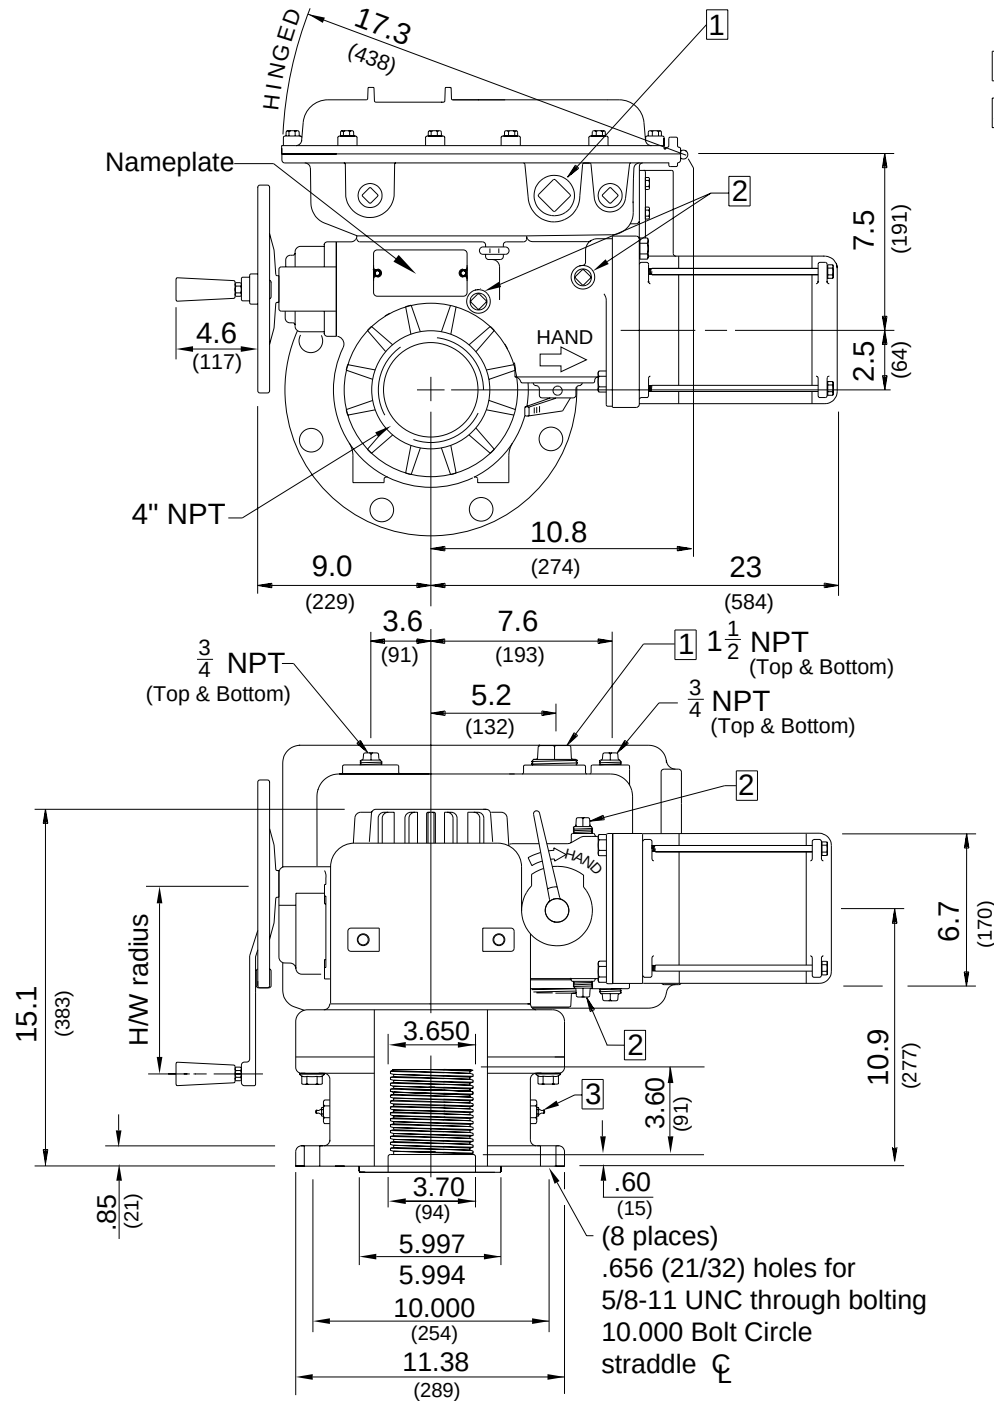

Maximum 3.50"
Acme Stem

INCHES .XXX ± .005"
(MILLIMETERS) .XX ± .020"
.X APPROX.

EIM EIM COMPANY, INC. 13840 PIKE ROAD CONTROLS MISSOURI CITY, TX 77489			
TITLE 4000 M / T 10.00			
OUTLINE NO. 4-TB01/25G			
A REV	8/11/95 DATE	9727 ERO	CML BY