
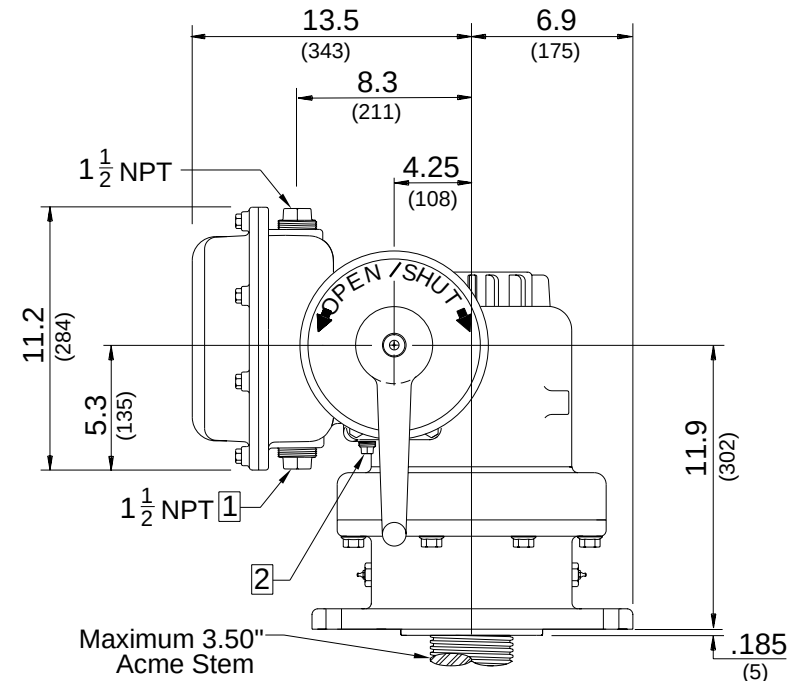
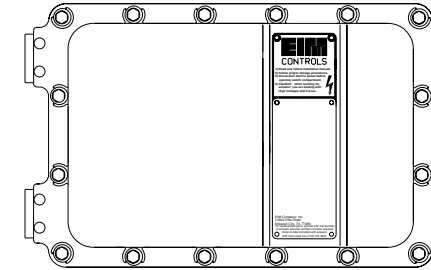


FOR REFERENCE ONLY - DRAWING NOT TO SCALE

- Notes: ① 1½ NPT is preferred wire entry. **CAUTION** Conduit must enter actuator at lowest point. If hazardous location seal conduit with drain type fitting.
- ② Gear Box Lubrication ½-14 NPT plugs.
- ③ Thrust base grease fittings

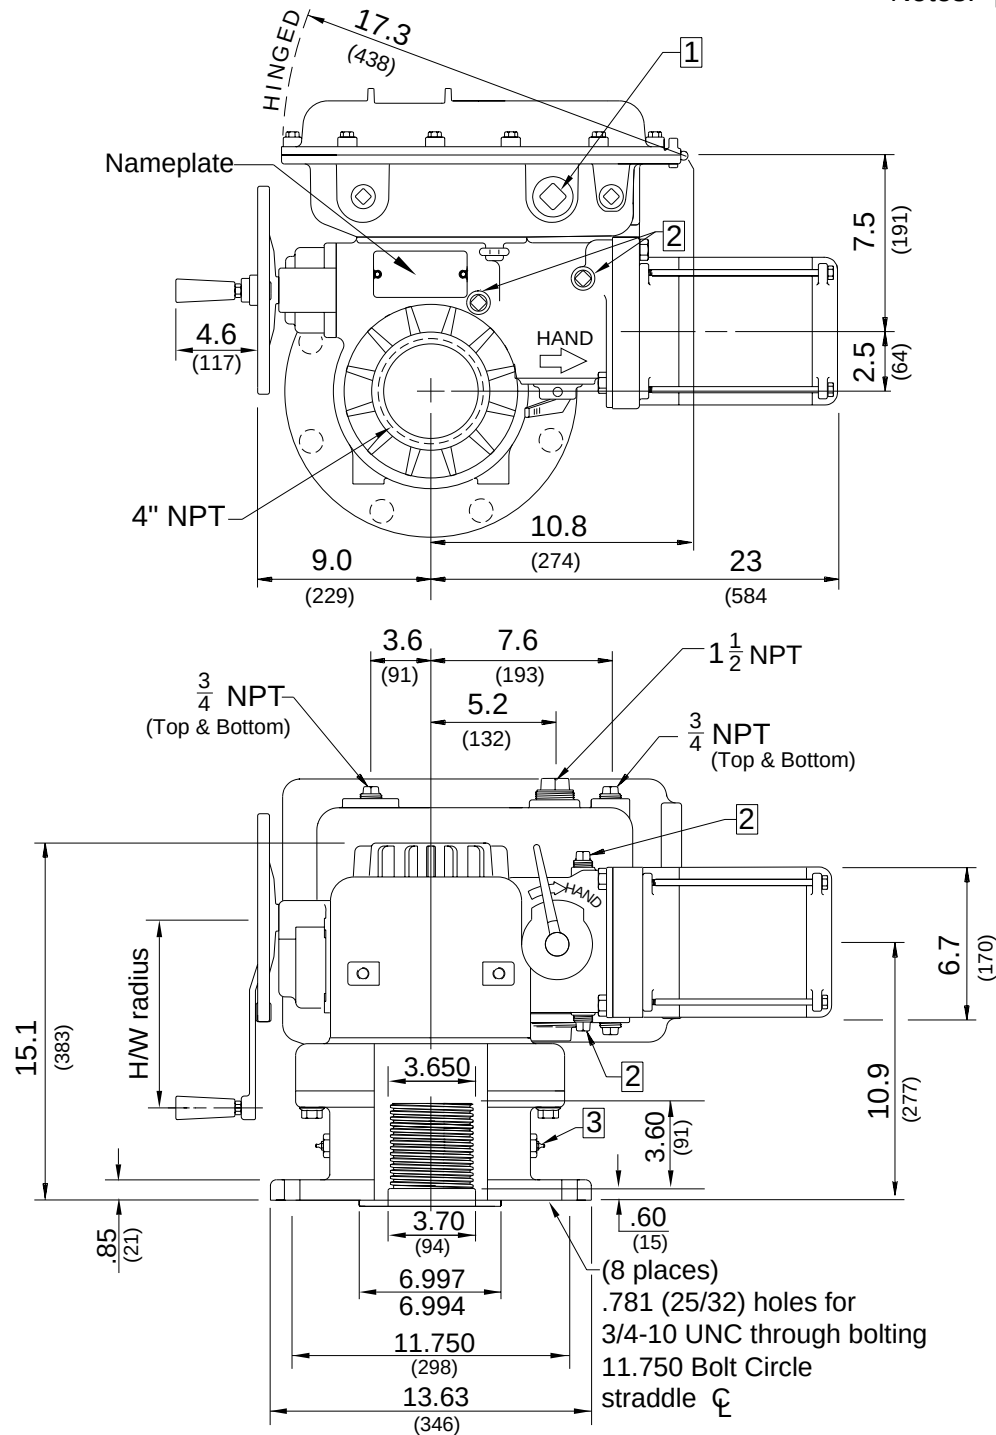

INCHES .XXX ± .005"
(MILLIMETERS) .XX ± .020"
.X APPROX.

EIM EIM COMPANY, INC.
13840 PIKE ROAD
CONTROLS MISSOURI CITY, TX 77489

TITLE **5000 M/T 11.75**
OUTLINE NO. **5-TB01/30G** A

A	8/11/95	9726	cml
REV	DATE	ERO	BY