FOR REFERENCE ONLY - DRAWING NOT TO SCALE

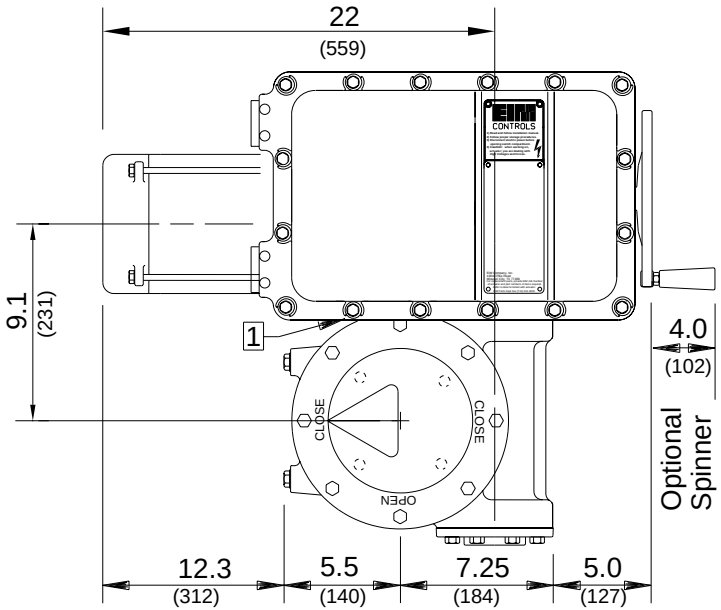

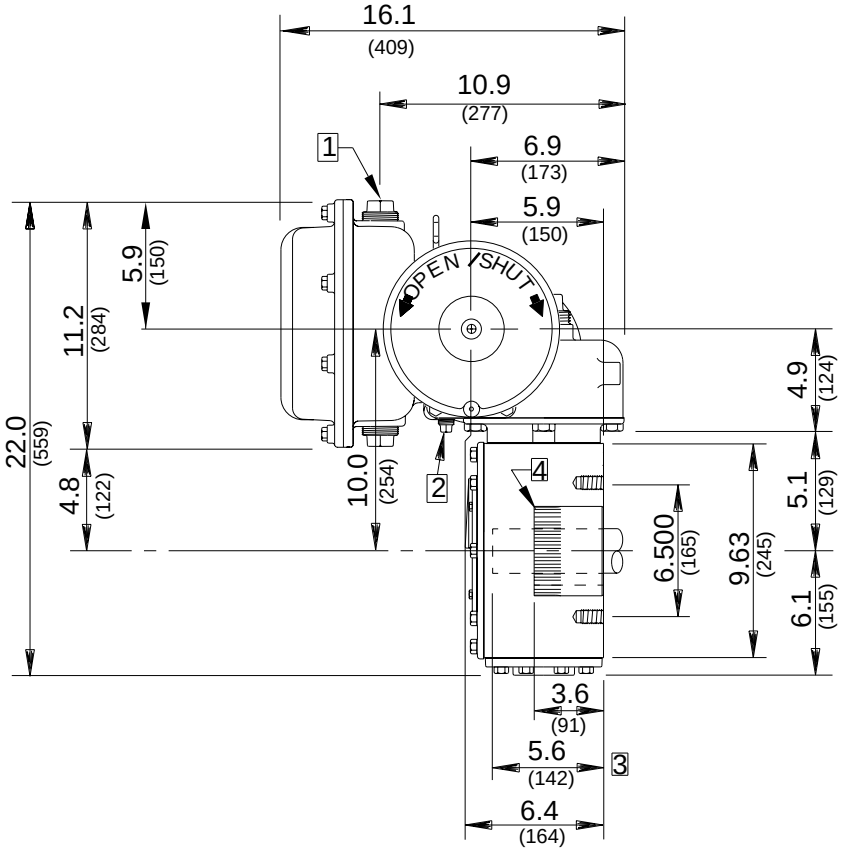

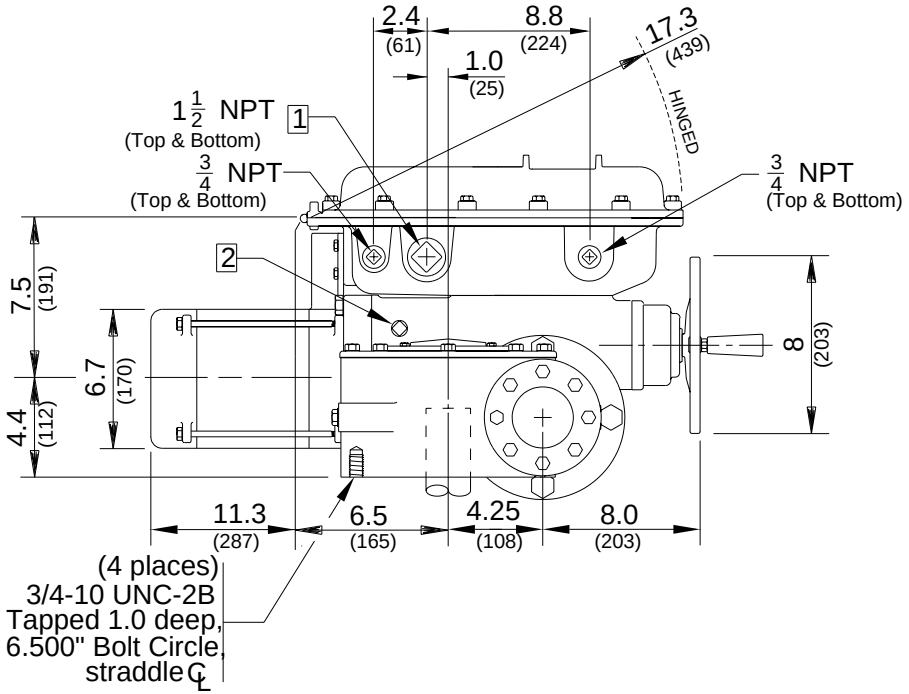

1. 1 1/2 NPT is preferred wire entry top or bottom.
2. Lubrication 1/2 -14 NPT plug.
3. Maximum valve stem length into actuator.
4. Spline Bush: Removable from the bottom of actuator. Refer to EIM Job Spec Sheet for Bushing furnished for specific application.

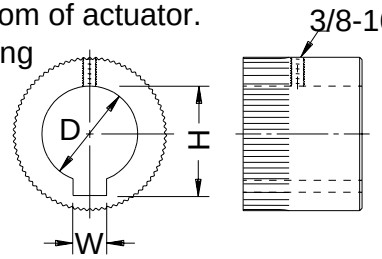

INCHES .XXX ± .005"
(MILLIMETERS) .XX ± .020"
.X APPROX.

EIM COMPANY, INC.
13840 PIKE ROAD
CONTROLS MISSOURI CITY, TX 77489

TITLE: M / MG02 1/4 T 6.50"

REV	DATE	ERO	BY
A	6/15/95	9587	/CML

OUTLINE NO. M-2001/16G REV A

FORM 00934-C