FOR REFERENCE ONLY - DRAWING NOT TO SCALE

1. $1\frac{1}{2}$ NPT is preferred wire entry top or bottom.
2. Lubrication $\frac{1}{2}$ -14 NPT plugs.
3. Spline Bush: Removable from the bottom of actuator. Refer to EIM Job Spec Sheet for Bushing furnished for specific application.
4. Adjustable mechanical stops: 90° ±8°

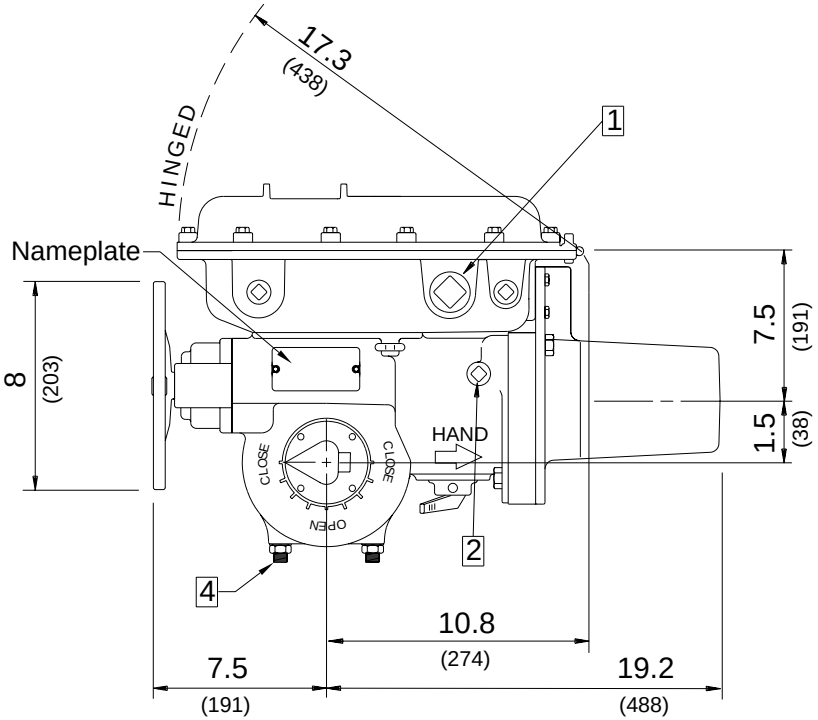

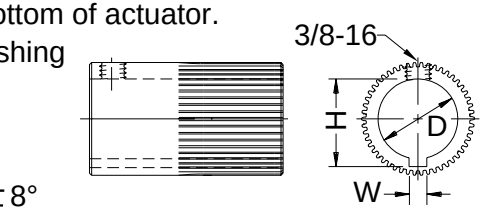

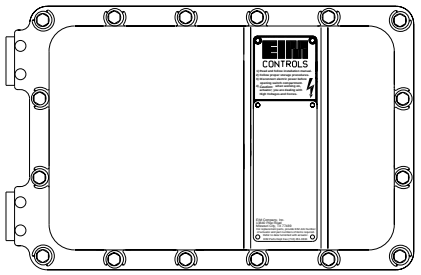

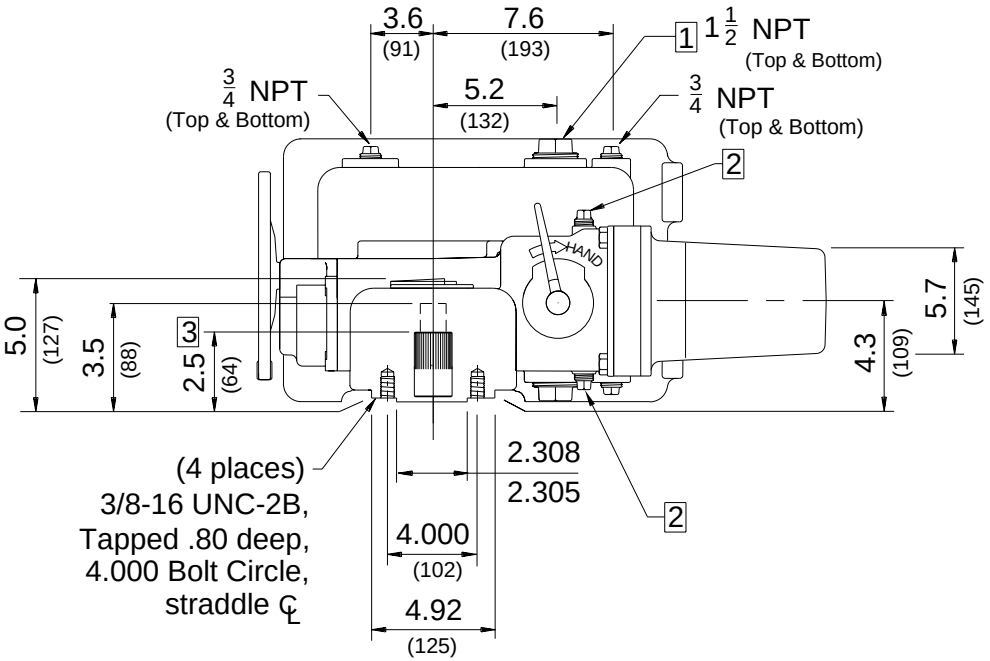

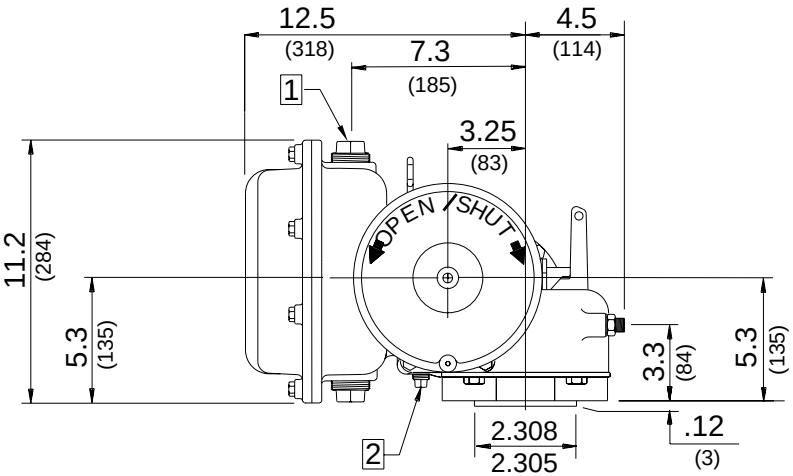

INCHES .XXX ± .005"
(MILLIMETERS) .XX ± .020"
.X APPROX.

EIM COMPANY, INC.
13840 PIKE ROAD
CONTROLS MISSOURI CITY, TX 77489

REV	DATE	ERO	BY
C	7/15/99		LE/CL

TITLE: P 1/4 TURN 4.00"

OUTLINE NO. P-0003/10G REV C

FORM 00934-C