



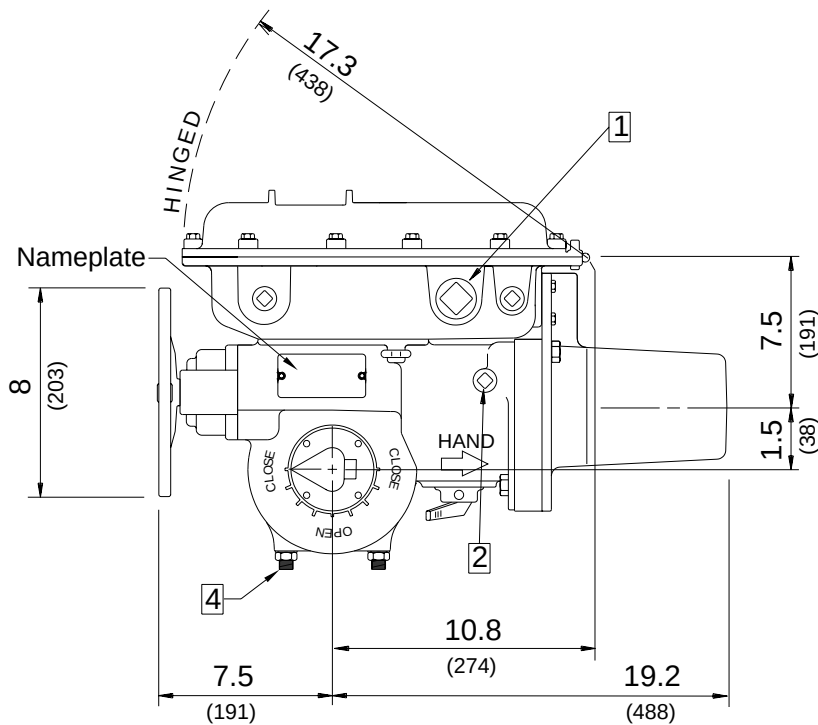




1 $1\frac{1}{2}$ NPT is preferred wire entry top or bottom.

2 Lubrication $\frac{1}{2}$ -14 NPT plugs.

3 Spline Bush: Removable from the bottom of actuator. Refer to EIM Job Spec Sheet for Bushing furnished for specific application.

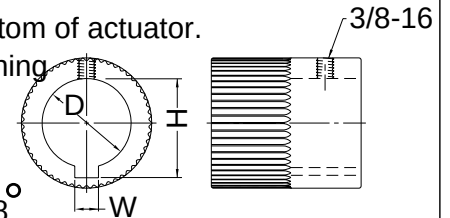

4 Adjustable mechanical stops: $90^\circ \pm 8^\circ$

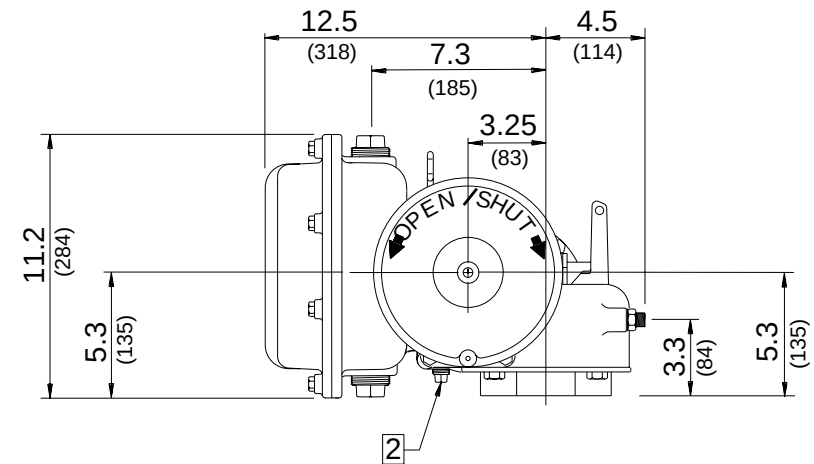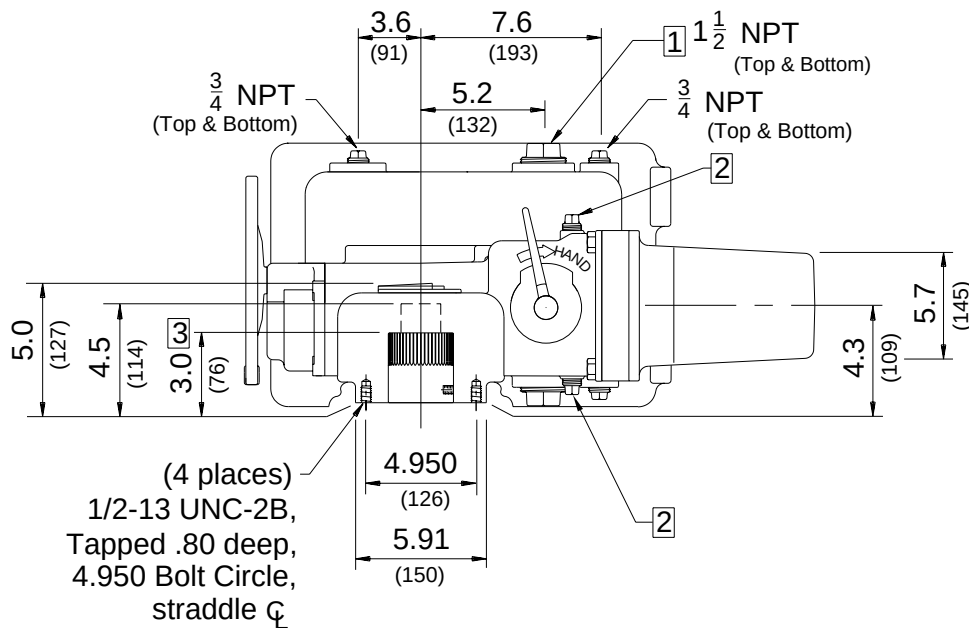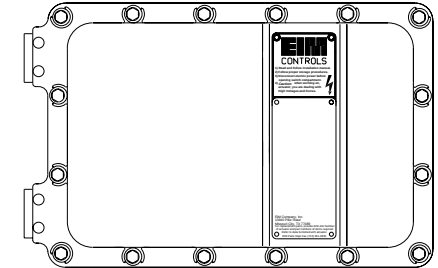

INCHES .XXX $\pm$.005"
(MILLIMETERS) .XX $\pm$.020"
.X APPROX.

EIM EIM COMPANY, INC.
13840 PIKE ROAD
CONTROLS MISSOURI CITY, TX 77489

TITLE **Q 1/4 TURN 4.95"**

B	7/14/99	LE/CML	BY
REV	DATE	ERO	BY

OUTLINE NO. **Q-0003/12G** B