






FOR REFERENCE ONLY - DRAWING NOT TO SCALE

① 1½ NPT is preferred wire entry top or bottom.

② Lubrication ½ -14 NPT plugs

③ Spline Bush: Removable from the bottom of actuator. Refer to EIM Job Spec sheet for Bushing furnished for specific application.

④ Adjustable mechanical stops: 90° ± 8°

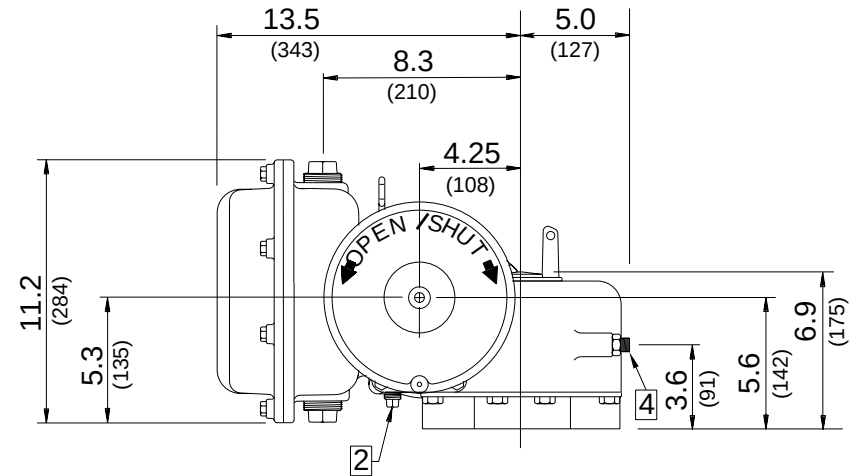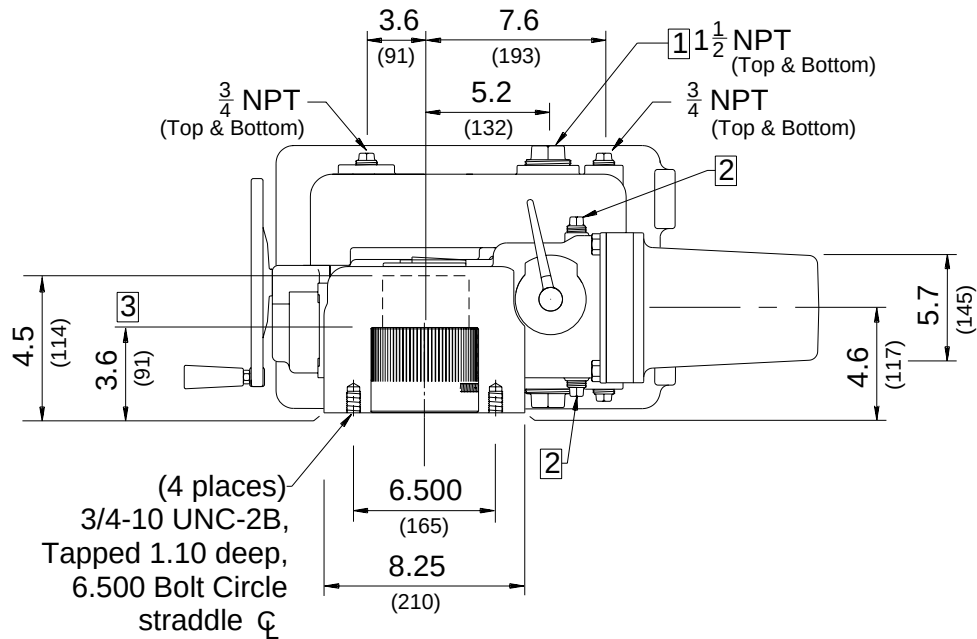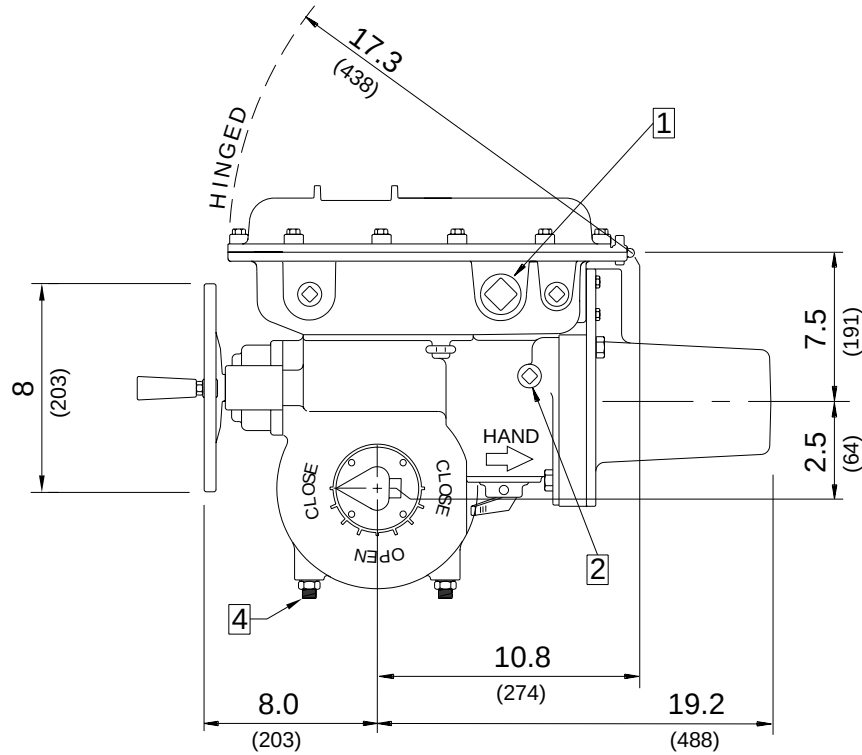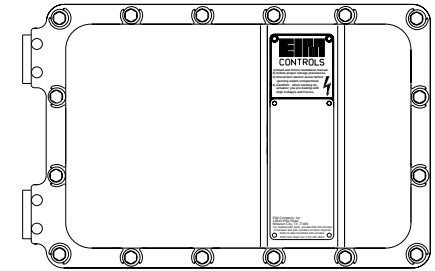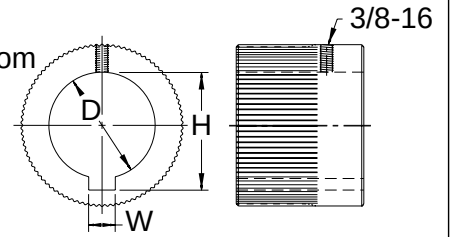

INCHES .XXX ± .005"
(MILLIMETERS) .XX ± .020"
.X APPROX.

EIM EIM COMPANY, INC.
13840 PIKE ROAD
CONTROLS MISSOURI CITY, TX 77489

TITLE **R 1/4 TURN 6.50"**

REV	DATE	ERO	BY	OUTLINE NO.	REV
A	6/14/95	9589	/CML	R-0003/16G	A