



CUSTOMER SUPPLY

FIELD WIRING

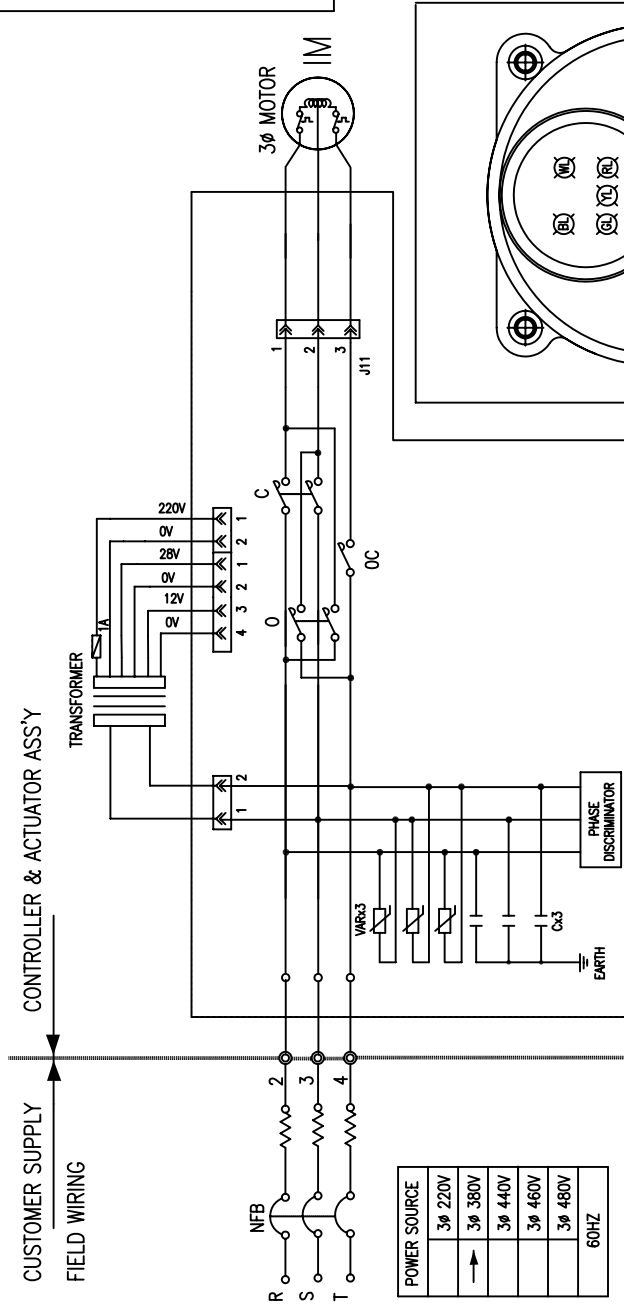

** TERMINAL BLOCK **

1	13
2	14
3	15
4	16
5	17
6	18
7	19
8	20
9	21
10	22
11	23
12	24

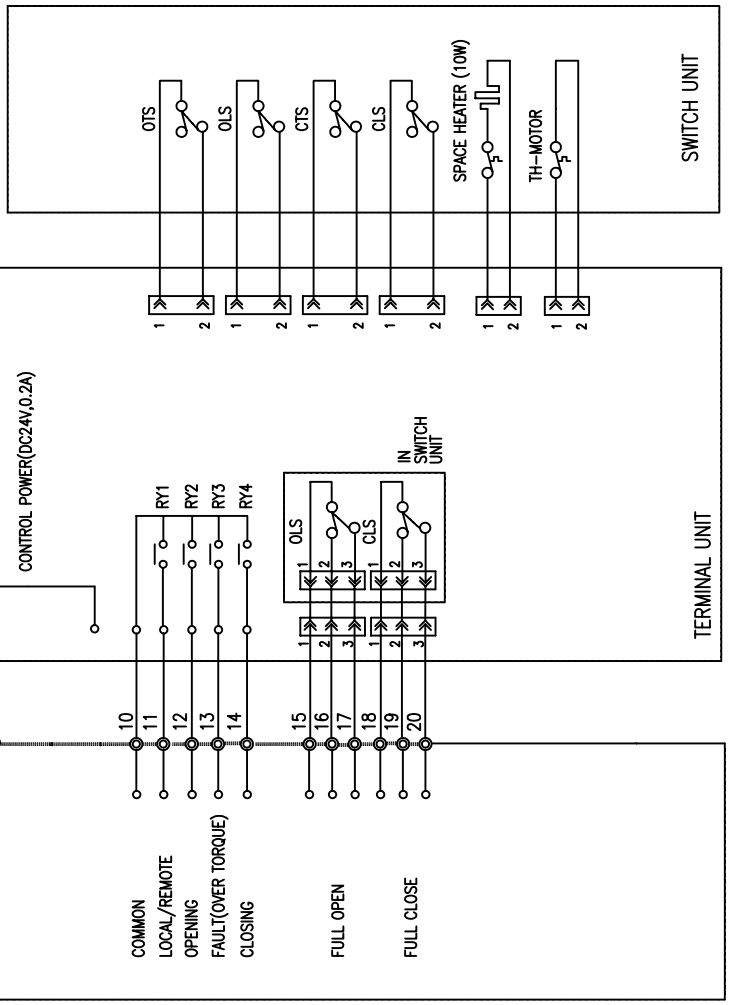

** NOTE **

- OLS : OPEN LIMIT SWITCH
- CLS : CLOSE LIMIT SWITCH
- OTS : OPEN TORQUE LIMIT SWITCH
- CTS : CLOSE TORQUE LIMIT SWITCH
- O/C : OPEN/CLOSE POWER RELAY(DC 24V)
- RL : RED LAMP FOR POWER
- GL : GREEN LAMP FOR CLOSE
- YL : YELLOW LAMP FOR FAULT
- RY1 : REMOTE MONITOR RELAY
- RY2/RY4 : RUNNING RELAY
- ◎ : MARKS FOR TERMINAL

** LIMIT SWITCH CONTACT POSITIONS **		
ROTOR	COM-FACT	VALUE OPENING (%)
OPEN	2-3	0
(OLS)	1-3	100
CLOSE	2-3	
(CLS)	1-3	

PROJ.								
	SYM	ECN NO	CHANGES			DATE	SIGN	APPR.
DRAW	P.S. KIM	SCALE	1/1	ISSU. DEPT. HADR	PART NAME SCHEMATIC WIRING DIAGRAM LCU-B			
DESIGN	S.I. CHOI	DIM.	mm	DATE 2004.06.10				
CHECK	 EIM CONTROLS				DWG. NO HQ – 93200A			
APPR.					1 OF 1 SHEET		DWG. SIZE A4	