


MATERIAL	ACTUATOR TYPE	A	B	C	D	E	F	G	K	H	L	M	N	Z	O	P	Q	R	
MILD STEEL	GP GH GO HPG	040	19.5	40	-	45	90	4	40	100	200	150	59.5	4	12	192	96	96	48.5
MILD STEEL	GP GH GO HPG	060	34	40	-	45	90	4	60	105	233	150	72	4	12	236	118	118	63
MILD STEEL	GP GH GO HPG	065	40	55	-	50	100	8	65	145	341	150	80	4	14	355	165	190	68
MILD STEEL	GP GH GO HPG	085	40	55	-	50	100	10	85	150	381	150	80	4	14	415	195	220	68
CAST IRON			40	55	-	-	-	-	85	130	370	150	80	4	M12x25	415	195	220	68
MILD STEEL	GP GH GO HPG	100	50	55	30	50	100	10	100	160	432	150	93	6	14	480	225	255	83
MILD STEEL	GP GH GO HPG	130	59	55	30	50	100	10	130	210	535	150	102	6	14	565	265	300	83
CAST IRON			68	55	55	-	-	-	130	158	513.5	150	113	6	M12x30	577	271	306	99
MILD STEEL	GP GH GO HPG	160	74	55	55	50	100	10	160	240	658	150	127	6	14	720	340	380	104
MILD STEEL	GP GH GO HPG	161	74	55	55	50	100	10	160	240	661	150	150	6	14	720	340	380	127
MILD STEEL	GP GH GO HPG	200	95	55	55	50	100	10	200	280	785	150	153	6	14	900	425	475	127
MILD STEEL	GP GH GO HPG	201	105	55	55	50	100	10	200	280	815	150	163	6	14	900	425	475	138
MILD STEEL	GP GH GO HPG	270	117	55	55	50	100	10	270	310	952	150	180	6	14	1090	510	580	162
MILD STEEL	GP GH GO HPG	271	127	55	55	50	100	10	270	340	982	150	210	6	14	1090	510	580	190
MILD STEEL	GP GH GO HPG	350	207	100	100	100	200	20	350	520	1500	300	360	6	17	1740	820	920	360

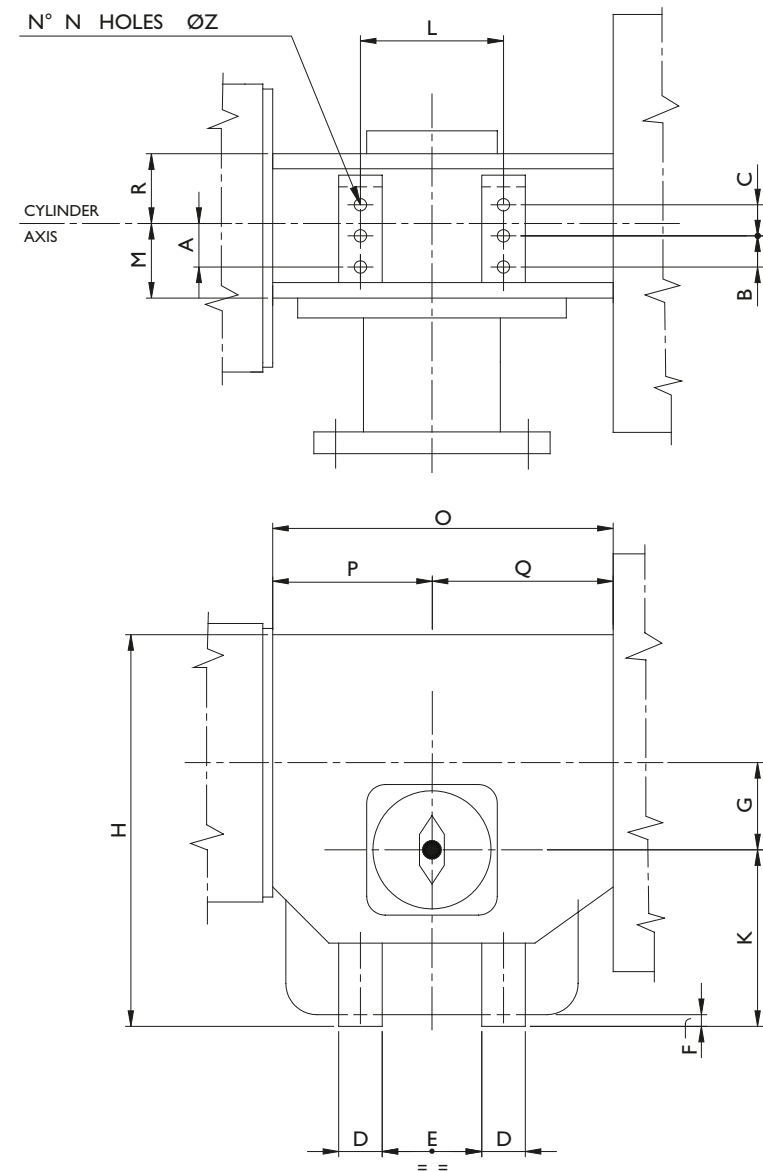

ALL DIMENSIONS ARE IN MM

rotork®
Fluid Systems

COUPLING ADAPTION
FOR POWER CONTROL UNITS

08	31.07.06	BERNINI	BARSOTTI
07	19.06.06	BERNINI	BARSOTTI
00	02.11.95	Camoni	Pisaroni
rev.	date	drawn	check

GD00198-040