


Pakscan

General Purpose Field Control Unit

Panel Mounted (PM-PB2)

rotork

Publication: S163E
Date of issue: 02/99
Page 1 of 4

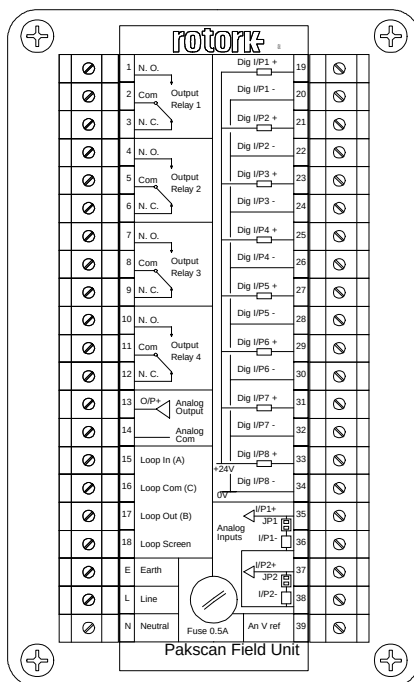

GENERAL DESCRIPTION

The Pakscan General Purpose Field Control Unit (GPFCU) provides a means of controlling actuators, pumps, motors, solenoid valves, mixers, etc., as well as interfacing digital and analogue information between field process devices and a Pakscan two wire loop system. The panel mounting PM-PB2 can be safely mounted within an existing enclosure to allow simple connection to the devices being controlled.

The PM-PB2 enclosure is manufactured from grey polycarbonate and includes fixing holes for surface mounting. The enclosure provides a degree of protection to IP55, however we recommend that it is always protected by an outer enclosure. Electrical connections are made to the terminal block on the lid of the unit.

PERFORMANCE SPECIFICATION

Pakscan 2 -Wire Interface

Baud Rate 2400, 1200, 600, 300 or 110
Current 20 mA
Conductors screened twisted pair

8 off Digital Inputs

Isolation mutual galvanic isolation
Input Voltage active $18V < V_i < 38V$
inactive $-0.5V < V_i < 2V$
Pulse input Input 1
Pulse width $> 20mS$
I/P power supply internal 24V at 20 mA max

4 off Digital Outputs

Contacts changeover
Operation fleeting or maintained (normally de-energised)
Voltage range up to 120V
Max load 60W, 125VA, (max 1 A)
Life 10^7 operations at 5W load

2 off Analogue Inputs

Range 0 to 5V, or 4 to 20 mA
Resolution 1.2mV
Thermal stability 100 ppm/°C

1 off Analogue Output

Voltage range 0 to 5V
Resolution 1.2mV
Thermal stability 100 ppm/°C
Load resistance $> 1 k\Omega$

Electrical Supply

Supply 110V ac $\pm 20\%$ or
230V ac $\pm 10\%/-20\%$, (47-63 Hz)

I/O DESCRIPTION

General Purpose Mode

4 off digital outputs, each with one independently addressable C/O contact rated at 60W, 125VA, (max 1A). All contacts can be either fleeting, (300mS), or maintained (requiring an energise and de-energise command).

1 off analogue output, 0 - 5V, with 1.2mV resolution, i.e. 12 bit accuracy.

8 off independent digital inputs, each requiring a volt free input. Each input can be configured to invert the incoming signal. (Input D1 also acts as a pulse counter, up to 9999, provided that the pulse is greater than 20mS).

Pakscan

General Purpose Field Control Unit

Panel Mounted (PM-PB2)

rotork

Publication: S163E
Date of issue: 02/99
Page 2 of 4

The state of the output relays and their action (fleeting or maintained) is reported as are status bits relating to the field unit itself.

2 off analogue inputs sharing a common return, either 4 - 20mA or 0 - 5V, reported as a value between 0% and 100%. Both inputs must be the same, i.e. voltage or current. For voltage inputs JP1 and JP2 must be removed. The default setting is for current inputs with JP1 and JP2 fitted.

Alarms

POWR - Reset (on restoration of power)
WDOG - Watchdog failure
MEMF - Memory failure
COMMS - Communication failure

Actuator Mode

Digital control
Open, Stop, Close, ESD, (ESD option is not available on all actuator types)

Position control
Over range 0% to 100%, (not available on all actuator types)

Digital feedback
The field unit reports the following status bits, (some of the options are not available on all actuator types):
OAS - open limit switch
CAS - closed limit switch
STOP - motor stopped
MRUN - motor running
MRO - motor running in open direction
MRC - motor running in closed direction
EXT - status of an external digital signal, (only available when position control is **not** used).
Further status bits relating to the field unit are also reported, i.e. loopback on, new alarm and alarm.

Analogue feedback
Valve position over range 0% to 100%, (not available on all actuator types)

Alarms
POWR- power on reset (on restoration of power)
WDOG - watchdog failure
MEMF - memory failure
COMMS - communication failure
CNA - local control selected
MREL - monitor relay tripped

THERM - thermostat tripped
LSTOP - local stop selected
(some or all of the above may not be available depending on actuator type).

Derived alarms

SFAIL - motor start or stop failure
VOBS - valve obstruction detected, torque tripped
VJAM - valve stuck detected, torque tripped
MOP - valve moved to open limit manually
MCL - valve moved to closed limit manually
MOPG - valve moved from closed limit manually
MCLG - valve moved from open limit manually
EOT - motor running at end of travel
(some or all of the above may not be available depending on actuator type).

MECHANICAL DESCRIPTION

Enclosure

Grey polycarbonate suitable for panel mounting protection rated to IP55.

Terminals

Clamping terminals suitable for up to 4.0mm² conductors for power supply, datahighway, I/O and earth connections.

EnvirnomentaI specification

Operating temperature, -30° to +70°C
Storage temperature, -50° to +85°C
Humidity, 5% to 95% R.H. non-condensing
Vibration, 0.75g (0.5Hz to 300Hz)


Pakscan

General Purpose Field Control Unit

Panel Mounted (PM-PB2)

rotork

Publication: S163E
Date of issue: 02/99
Page 3 of 4

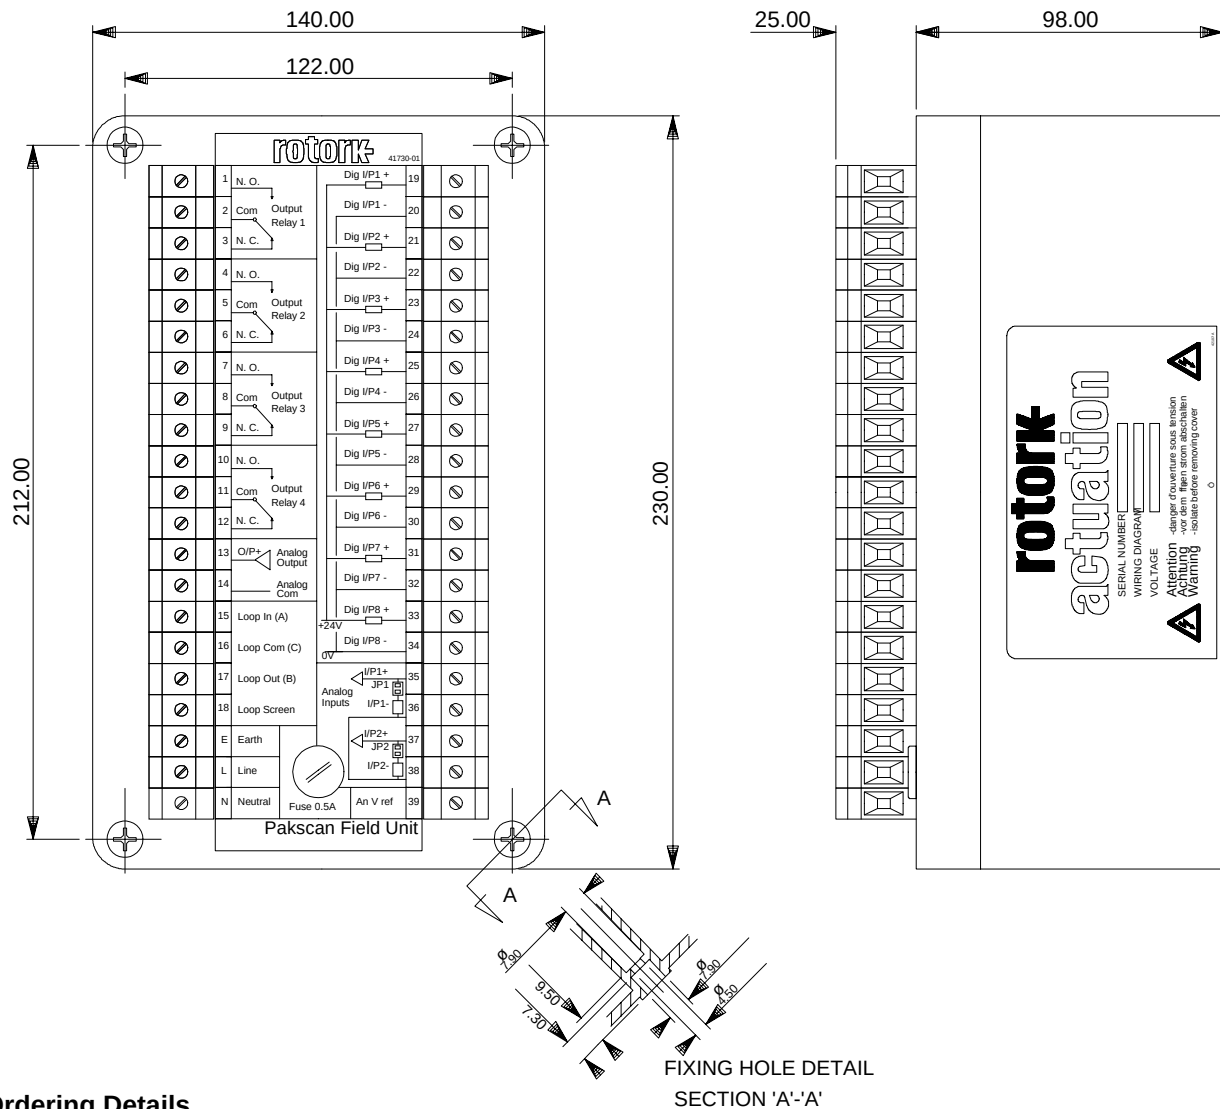

Ordering Details

With all orders it is necessary to specify the supply voltage for the field unit.

PM - PB2 - X

- └ Supply Voltage
- 1 = 110 V ac
- 2 = 230 V ac

Example:

PM-PB2- 1
110 V ac supply


Pakscan

General Purpose Field Control Unit

Panel Mounted (PM-PB2)

rotork

Publication: S163E
Date of issue: 02/99
Page 4 of 4

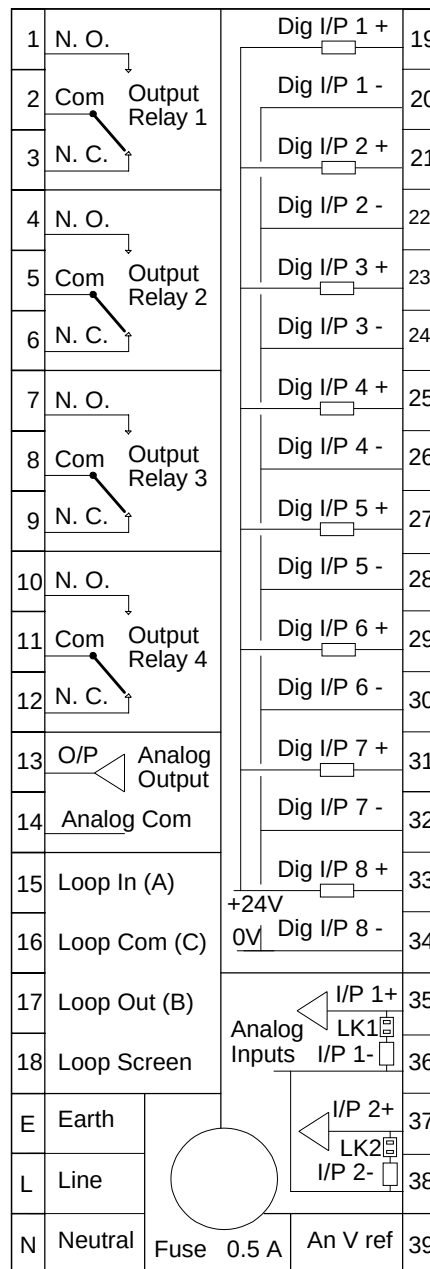

PM-PB2 connection details

rotork

UK head office
ROTORK CONTROLS LTD
telephone Bath (01225) 733200
telefax (01225) 333467
e-mail mail@rotork.co.uk

USA head office
ROTORK CONTROLS INC
telephone Rochester (716) 328 1550
telefax (716) 328 5848
e-mail info@rotork.com

http://www.rotork.com

As we are continually developing our products, their design is subject to change without notice.

The name Rotork is a registered trade mark

	telephone	telefax		telephone	telefax
AUSTRALIA Ballarat	(053) 381 566	(053) 381 570	KOREA (South) Seoul	(02) 565 4803	(02) 565 4802
CANADA Calgary	(403) 569 9455	(403) 569 9414	MALAYSIA	(03) 519 3093	(03) 519 30998
CANADA Toronto	(905) 602 5665	(905) 602 5669	NETHERLANDS	(010) 414 6911	(010) 414 4750
CHINA Shanghai	(021) 627 7680	(021) 627 7681	RUSSIA Moscow	(503) 2349125	(503) 2349125
CHINA (N and Central)	(10) 646 21617	(10) 646 20713	SAUDI ARABIA	(03) 833 0702	(03) 833 9369
CHINA Beijing	(10) 646 21617	(10) 646 20713	SINGAPORE	457 1233	457 6011
FRANCE Paris	(01) 43111550	(01) 48354254	SOUTH AFRICA	(11) 453 9741	(11) 453 9894
GERMANY Hilden	(02103) 54098	(02103) 54090	SPAIN Bilbao	(94) 676 6011	(94) 676 6018
HONG KONG, S.China	2520 2390	2528 9746	THAILAND bangkok	(02) 272 7165	(02) 272 7167
INDIA Chennai	(044) 625 8494	(044) 625 7108	USA Houston	(713) 782 5888	(713) 782 8524
INDONESIA Jakarta	(21) 580 6764	(21) 581 2757	USA West Coast	(707) 769 4880	(707) 769 4880
ITALY Milan	(02) 457 03300	(02) 457 03301	VENEZUELA Caracas	(02) 263 6533	(014) 250 822