



Everything for the valve and actuator industry
...except valves & actuators


Mounting Kits

DIN ISO 5211 Valve Actuator Mounting Brackets

The mounting brackets cover a range of Valve-Actuator interfaces from sizes F03 – F16.

SPIGOT Ø TOLERANCE +0.5/+1.0 mm

All brackets normally offered from this range are manufactured from Stainless Steel – Grade 304.

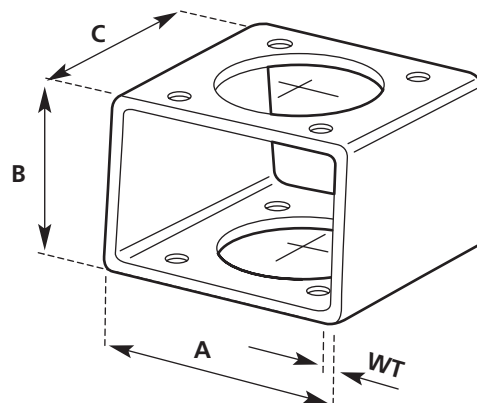

Code No	Interface Drilling	A	B	C	Wall Thickness
XF3	F03 - F03	60	40	40	4
XF4	F04 - F04	100	50	45	4
XF5	F05 - F05	100	60	50	5
XF7	F07 - F07	100	60	70	5
XF10	F10 - F10	120	80	100	6
XF12	F12 - F12	160	80	120	6
XF14	F14 - F14	160	80	140	8
XF16	F16 - F16	200	100	165	8
XF7-T	F07 - F07 TALL	120	80	70	5
XF10-T	F10 - F10 TALL	150	100	100	6
XF12-T	F12 - F12 TALL	150	100	120	6
XF14-T	F14 - F14 TALL	200	100	140	8
XF16-T	F16 - F16 TALL	200	200	165	8

DIMENSION = MM

TOLERANCE = +0.5 / +1.0MM

Material

Finish

Stainless Steel - Grade 304

Natural

Fasteners available on request. Other materials are available on request.
To order quote code number only.


Our mounting kits are manufactured in accordance with BVAMA recommendations.

DIN ISO 5211 Valve Actuator
Trapezoidal Mounting Brackets

The mounting brackets cover a range of Valve-Actuator interfaces from a combination of sizes from F03 - F14.

SPIGOT Ø TOLERANCE +0.5/+1.0 mm

All brackets normally offered from this range are manufactured from Stainless Steel - Grade 304.

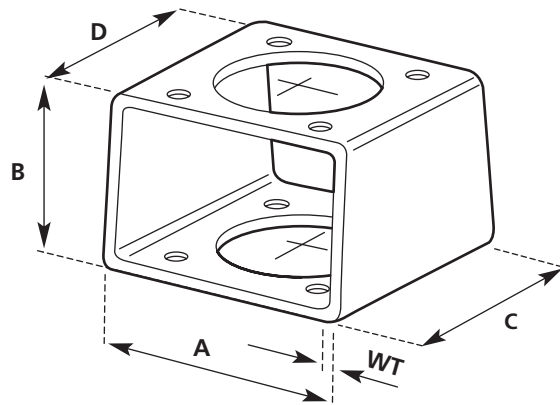

Code No	Interface Drilling	A	B	C	D	Wall Thickness
XF34	F03 - F04	60	40	45	35	4
XF35	F03 - F05	60	40	50	35	5
XF45	F04 - F05	100	50	50	50	5
XF57	F05 - F07	100	60	70	50	5
XF47	F04 - F07	100	60	70	50	5
XF710	F07 - F10	120	60	100	70	6
XF712	F07 - F12	160	80	130	85	6
XF1012	F10 - F12	160	80	120	100	6
XF1014	F14 - F10	160	80	140	105	6
XF1214	F12 - F14	200	100	140	140	6
XF710T	F07 - F10 TALL	120	80	100	70	6

DIMENSION = MM

TOLERANCE = +0.5 / +1.0MM

Material

Finish

Stainless Steel - Grade 304

Natural

Fasteners available on request. Other materials are available on request.
To order quote code number only.


Our mounting kits are manufactured in accordance with BVAMA recommendations.

Valve Actuator Drive Couplings

The drive couplings are offered pre-machined, ready for final customising to suit the valve drive. The square drive is manufactured to suit actuators conforming to ISO 5211 or DIN 3337.

SQR TOLERANCE -0.02/-0.07mm

All couplings offered in this range are manufactured from Stainless Steel - Grade 303.

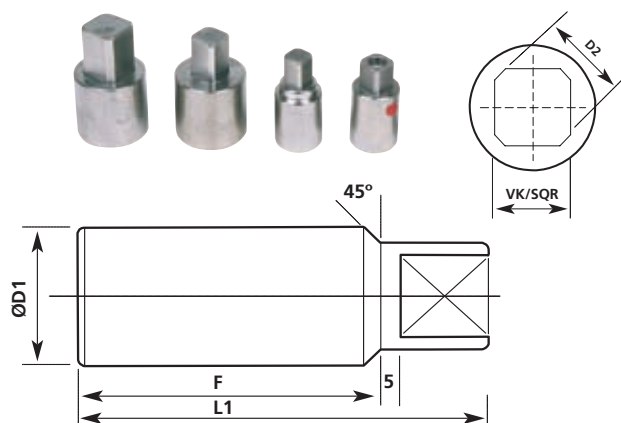

Code No	VK SQR	L1	D1	D2	F
X20-50-9	9 mm	50	20	11	36
X25-75-11	11 mm	75	25	13	59
X25-75-14	14 mm	75	25	17	56
X30-75-14	14 mm	75	30	17	56
X25-75-17	17 mm	75	25	21	53
X30-75-17	17 mm	75	30	21	53
X35-75-19	19 mm	75	35	23	51
X45-100-22	22 mm	100	45	27	73
X50-100-27	27 mm	100	50	33	68
X60-120-36	36 mm	120	60	45	79
X85-140-46	46 mm	140	85	57	89

DIMENSION = MM

SQR TOLERANCES: -0.02 / -0.07 MM

NORBRO Actuator Couplings

Code No	VK SQR	A L1	B D1	E D2	F
X25-75-11.1	11.1 mm	75	25	14	55
X30-75-14.27	14.27 mm	75	30	18	51
X40-100-19.05	19.05 mm	100	40	24	69

DIMENSION = MM

SQR TOLERANCES: -0.02 / -0.07 MM

Material | Finish



[Stainless Steel - Grade 303](#)

Natural

Fasteners available on request. Other materials are available on request.
To order quote code number only.

Our mounting kits are manufactured in accordance with BVAMA recommendations.

NAMUR Mounting Bracket

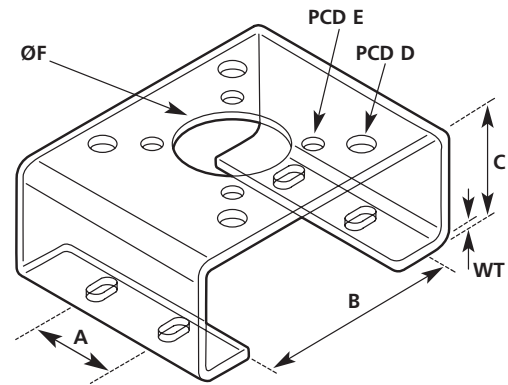

Code No	A	B	Bracket Height C	ØF	PCD D & Hole Ø	PCD E & Hole Ø	WT
N01	30	80	45	35	80.8/Ø9	50/Ø7	3
N02	30	80	55	35	80.8/Ø9	50/Ø7	3
N03	30	130	55	35	80.8/Ø9	50/Ø7	3

DIMENSION = MM

Material | Finish




Stainless Steel -Grade 304

Natural

Fasteners available on request. Other materials are available on request.
To order quote code number only.

Our mounting kits are manufactured in accordance with BVAMA recommendations.

Custom Machined Coupling

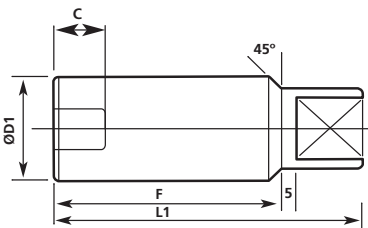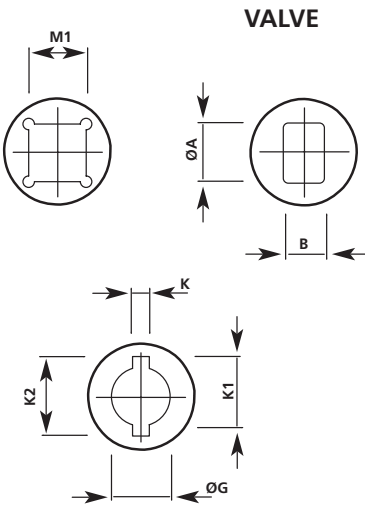

0 DEG 45 DEG

Note:
VK/SQR to be selected
from page 4

rotork®

Rotork Valvekits

Brookside Way
Nunn Park
Huthwaite
Nottinghamshire NG17 2NL
England

tel: +44 (0)1623 440211
fax: +44 (0)1623 440214
email: sales@rotorkvalvekits.com

Rotork Gears UK

Regina House
Ring Road
Bramley, Leeds
West Yorkshire LS13 4ET
England

tel: +44 (0)113 2057276
fax: +44 (0)113 2563556
email: sales@rotorkgears.com

Rotork Gears BV

Nijverheidstraat 25
7581 PV Losser
P.O. Box 98
7580 AB Losser
The Netherlands

tel: +31 (0)53 - 5388677
fax: +31 (0)53 - 5383939
email: info@rotorkgears.nl

Rotork Gears S.R.L.

via Olona, 65/67
20015 Parabiago (MI)
Italy

tel: +39 0331 552128
fax: +39 0331 553147
email: info@rotorkgears.it

Rotork Gears Shanghai

No. 260 Lian Cao Road
Xin Mei Urban Industrial Park
Min Hang District
Shang Hai 201108
China

tel: 0086-21-64348388
fax: 0086-21-64348366
email: info@rotorkgears.com.cn

Rotork Gears Americas

1811 Brittmoore
Houston
Texas 77043
USA

tel: +1 713 983 7381
fax: +1 713 856 8022
email: gears@rotorkgears.com

Rotork Gears India

165/166, Bommasandra,
Jigani Link Road,
Kiadb Industrial Area,
Anekal Thaluk,
Jigani Hobli, Bangalore 562106

tel: +91 80 3098 1600
fax: +91 80 3098 1610
email: sales@rotork.co.in

A full listing of our worldwide sales and service network is available on our website at **www.rotork.com**